
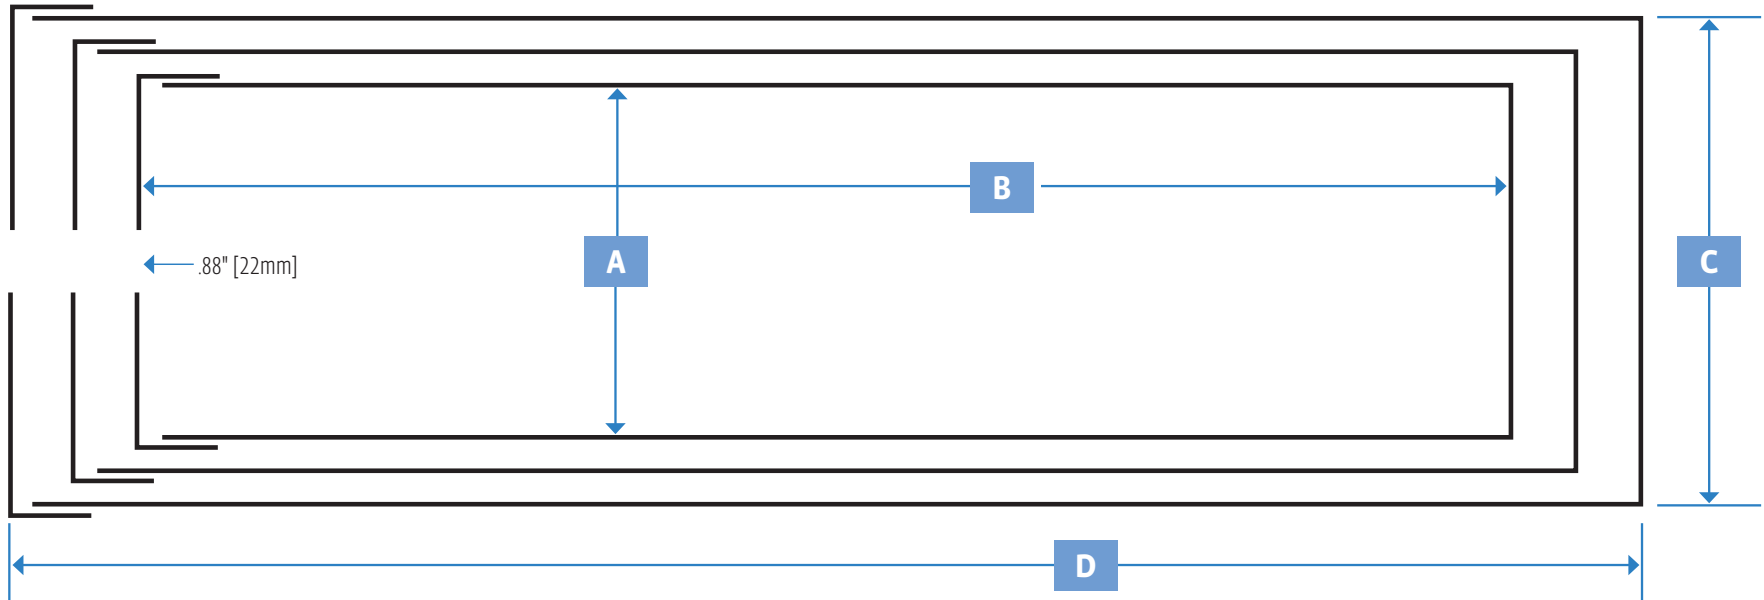


SPECIFY YOUR CUSTOM ZERO GAUSS CHAMBER



Your part number	A Min Inside Diameter	B Min Inside Depth	C Max Outside Diameter	D Max Overall Length	Number of Layers	Thickness per Layer
ZG-206	6" [152mm]	15" [381mm]	8.25" [210mm]	17.25" [438mm]	3	.025" [0,64mm]
ZG-209	9" [229mm]	27" [686mm]	11.25" [286mm]	29.25" [743mm]	3	.030" [0,76mm]
ZG-212	12" [305mm]	36" [914mm]	14.25" [362mm]	38.25" [972mm]	3	.040" [1,02mm]
ZG-218	18" [457mm]	54" [1372mm]	20.50" [521mm]	56.50" [1435mm]	3	.062" [1,57mm]

Please provide size and location of additional holes as required.

PRODUCT SPECIFICATIONS

- Material:** MuMETAL® Alloy
- Construction:** Full heliarc butt seam welds. Covers slip-fit over cans
- Anneal:** Perfection annealed after fabrication
- Finish:** None Required
- Assembly:** Non-magnetic stainless steel tube layer spacers for alignment & isolation
- Degaussing Coil:** Optional - used to reduce residual magnetism. Wrapped outside of inner layer
- Custom Chambers:** Available in 6-8 weeks. Please send dimensions and specifications
- Terms:** Net 30 with approved credit

You are invited to contact our Engineering Department to discuss your fabrication and finishing requirements. For a prompt and accurate quotation, send a drawing, sketch, or written description to shields@magnetic-shield.com.

Call For Pricing and Delivery



Rev 04/14

MAGNETIC SHIELD CORPORATION
Perfection Mica Company
740 N. Thomas Drive
Bensenville, IL 60106 U.S.A.

E: shields@magnetic-shield.com
P: 630-766-7800
F: 630-766-2813
www.magnetic-shield.com

MuMETAL®, CO-NETIC®, NETIC® and INTER-8® are registered trademarks of Magnetic Shield Corporation, U.S.A. All rights reserved.